


ASSEMBLING THE FIXTURE

WARNING: Be sure the electricity to the wires you are working on is shut off either the fuse is removed or the circuit breaker is set at OFF.

Carefully remove the fixture from the carton, and check that all parts are included, as shown in figure. Be careful not to misplace any of the screws or parts which are needed for installing the fixture.

1. Thread stem into center of the ceiling pan. Lock in place with a hexnut.
2. Position crossbar on ceiling. Align slotted hole in crossbar to threaded holes in outlet box. Attach with two screws. (Screws not provided.)
3. Thread fixture mounting screws into holes of crossbar. Three turns each.
4. If the GREEN GROUNDING SCREW is supplied with a WASHER, slip the WASHER over the GREEN GROUNDING SCREW. With the cupped side of the WASHER facing the head of the screw. Screw into the small threaded hole in the CROSSBAR. DO NOT TIGHTEN.

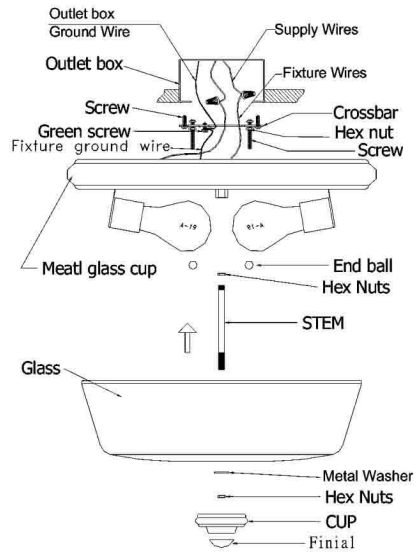

CONNECTING THE WIRES

Connecting the wires to the connectors is shown in FIGURE 2.

1. If your OUTLET BOX is provided with a GROUNDING WIRE (GREEN or BARE COPPER only), attach it to the GREEN GROUNDING SCREW by wrapping it around the SCREW between the WASHER and the HEAD of the SCREW. Tighten the SCREW.

WARNING: DO NOT ATTACH ANY OTHER WIRE TO THIS SCREW.

2. Place the white wires from the fixture evenly against the white wire from the outlet box and then twist together the bare parts of the wires.
3. Fit the connector over the twisted wires and screw the connector in place until you feel a firmness.
4. Try gently to pull the connector off the wires. If you can pull the connector off, carefully redo steps 1 and 2 above. Check again for a firm connection.
5. Connect the black wires in the same manner.
6. After the wires are connected, tuck them carefully inside the outlet box.
7. Then slip the ceiling pan over the mounting screws to protrude through keyhole slots. Rotate the ceiling pan clockwise until the screws are in the narrow part of the keyhole slots. Tighten the screws.
8. Install the lamps.
9. Raise glass diffuser to ceiling pan so that center pipe protrudes through hole in glass diffuser. Secure in place with washer and hexnut. Slide cup over center pipe and secure in place with finial.

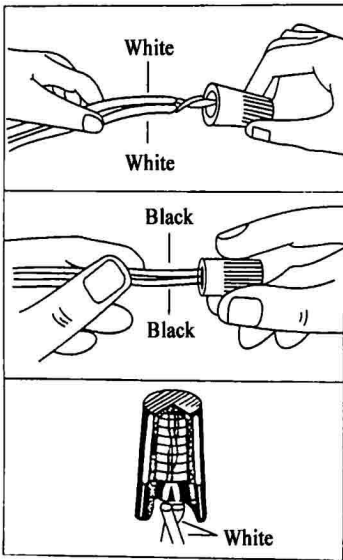


Figure 2-Wire Connectors